


# SCAMBIATORI A PIASTRE ISPEZIONABILI GASKETED PLATE HEAT EXCHANGERS

## PHE TH

Conessioni/Connections: DN32 ÷ DN50  
Superficie piastra/Plate surface: 0,042 ÷ 0,220

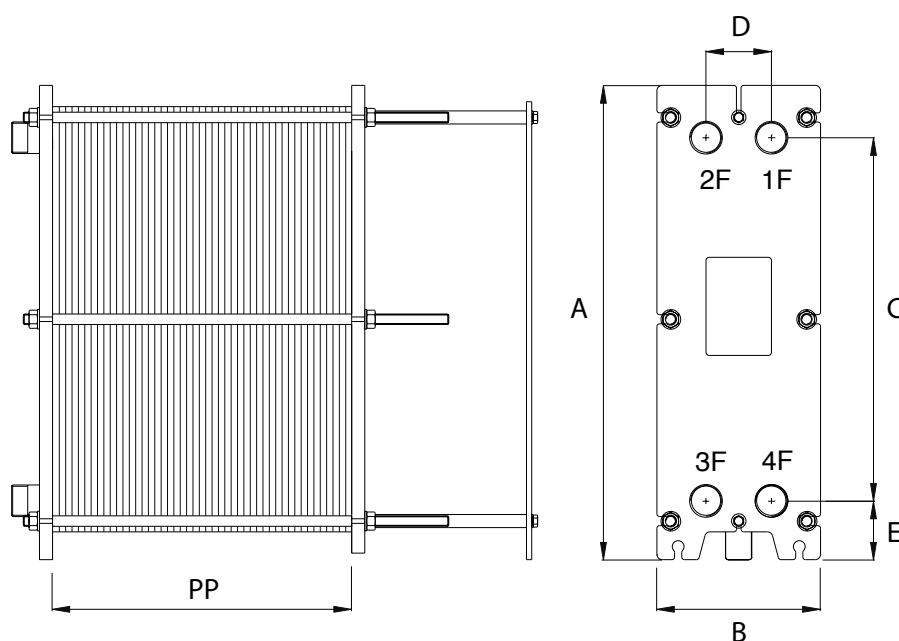

### CARATTERISTICHE / FEATURES

Modello	Diametro connessioni	Superficie piastra m <sup>2</sup>	Press. max di esercizio bar	A	B	C	D	E	PP
				mm					
K042	1"1/4 GAS M - DN32	0.042	10 ÷ 16	470	200	380	68	45	NPx3,1+2
K080	1"1/2 GAS M - DN40	0.085	10 ÷ 16	725	250	555	100	90	NPx3,05+2
F10	2" GAS - DN50	0.100	10 ÷ 16	733	310	494	126	126	NPx2,9+3
F16	2" GAS M - DN50	0,150	10 ÷ 16	932	310	694	126	126	NPx2,9+3
F22	2" GAS M - DN50	0.220	10 ÷ 16	1132	310	894	126	126	NPx2,9+3

Model	Couplings diameter	Plate surface m <sup>2</sup>	Max working pressure bar	A	B	C	D	E	PP
				mm					